

# CA700 Time Tracking Solution



Magnetic Stripe



Fingerprint



Keypad



Barcode



Proximity

## Manage Your Workforce

- Collects time and attendance data for accurate and indisputable records.
- Ideal for time and attendance, data collection, access control and much more.
- Up to 20,000 event capacity for internal storage.
- Backwards compatibility with CA500 terminals.

## Eliminate Buddy Punching

- Integrated fingerprint biometrics offer added security (optional).
- Employees must be present to punch in/out using their unique fingerprint.

## Expandable and Flexible: Grown with your business

- Easy to add additional terminals.
- Connectivity options including RS232, Ethernet and Modem.
- Reader options include biometric, keypad entry, magnetic stripe, barcode and HID proximity reader.
- Flexible terminal platform can be customized to individual specifications.

# CA700 Data Collection Terminal

## Display

2 Line by 20 character blue backlit LCD (alphanumeric).

## Memory

Flash	1 Mb (Standard) 2 Mb (Optional)
SRAM	512 kb (Standard)
FRAM (10k Transactions Typical)	1 Mb (Optional) 128 kb (Standard)
DATA Flash	256 kb (Optional) 512 kb (Optional)

## Battery Capabilities

Internal lithium battery powers the real time clock. Data is retained in FRAM memory which does not require external power to maintain data.

## Printer Connection

Parallel port 25 pin DB..

## Communications

RS232 (Standard), RS485 2 wire single terminal or multi dropped protocols (LAN), internal 56K-baud modem, or Ethernet/Internet TCP/IP (RJ45), 10/100 BaseT.

## Dimensions

8.7 in. (23 cm) wide x 6.1 in. (16 cm) tall x 2.3 in. (6 cm)

## Power

120/240V. 50Hz/60Hz wall mount transformer 9 volt AC, 1000 mA minimum.

## External Hardware Options

Access control/Signal relay kit.



## Media Options

- Integral Keypad.
- Integrated Fingerprint Reader (CCD Technology)
- Magnetic Stripe Card Reader (ABALL). A Track 2 ABA magnetic badge reader is standard.
- Barcode Reader, Code 39, Interleaved 2 of 5, (visible or infrared).
- Proximity badge reader: 125 kHz RFID or HID Proximity Reader 26 Bit.
- External Bar Code Reader.
- Pen Wand.


## Enclosure

Flame retardant Polycarbonate/ABS, with reversible wall mounting bracket and secured access door that protects I/O Ports.

## System Requirements

Windows 2000/2003 Server, XP or Vista.  
CA700 is fully compatible with Acrosoft's software .NET, with Pendulum and customized applications software.

## Configuration Options

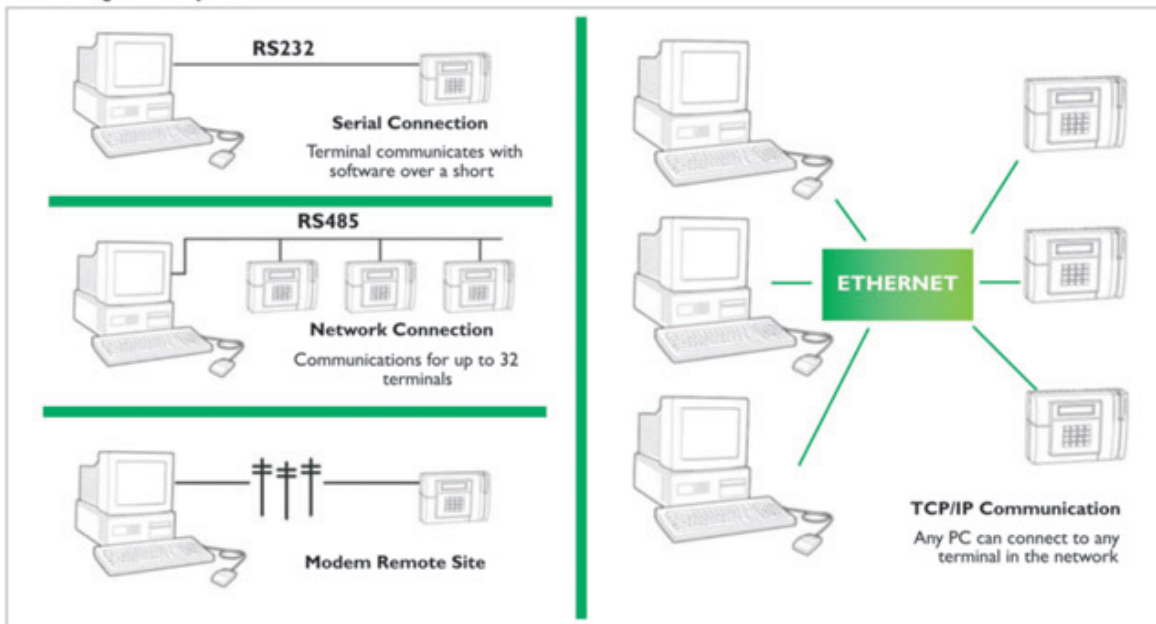

**ACROSOFT**  
Wholesale Distributor

salesLA@acrosoft.net  
www.acrosoft.net

Tel.: 305.477.4674

Fax: 305.477.4673

Acrosoft LLC  
10800 NW 21 ST  
Suite No. 150  
Miami, Florida 33172

CA700-090608A-1